



PRICE LIST
JAN' 2026

BE THE SOURCE



BE THE SOURCE

Since 1978 Precision Pipes has been one of India's leading manufacturers in Electrical & Plumbing Piping Systems and continue to be the source of carrying electricity and water safely into homes and work spaces across the world. Today we take our first step towards Lighting.



Precision is now the source for Lighting Systems.

Light is the source of life. With Precision LED Lighting Systems, we wish to inspire and empower our patrons to look at lighting in a creative way.

We want your spaces to come alive.

Light up your imagination and get ready to explore endless possibilities.
It's time to paint with light!

Kunal S. Kadakia



IT'S NOT WHAT YOU SEE,
IT'S HOW YOU SEE IT.

C O N T E N T S

SIRIUS
HIGH BEAM LED BULBS

01

ATRIA
HIGH POWER LED BULBS

02

NEUTRONSTAR
INVERTER LED BULBS

03

REGULUS
LED BATTENS

04

SAIPH
LED PANEL LIGHTS

05 - 06

TRIANGULUM
LED PANEL LIGHTS

07

PEGASUS
LED PANEL LIGHTS

08

TAYGETA
TWIN COLOUR LED PANEL LIGHTS

09

CARINA
SURFACE LED PANEL LIGHTS

10

ALNILAM
AL LED PANEL LIGHTS

11 - 12

POLLUX
2X2 LED PANEL LIGHTS

13

APUSTAR
LED JUNCTION DOWNLIGHTS

14 - 18

BELLATRIX
LED SPOTLIGHTS

19 - 20

ALNITAK
COB LED SPOTLIGHTS

21 - 25

VELORUM
DECORATIVE LED LIGHTS

26 - 27

CENTAURUS
LED STREET LIGHTS

28 - 29

MINTAKA
LED FLOOD LIGHTS

30 - 32

PROCYON
LED HIGHBAY LIGHTS

33 - 34

SIRIUS

HIGH BEAM LED BULBS



7W | MRP (₹) 106

Product Code: PPI-SRS-7W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 700 Lumens
Efficacy: 100 lm/W
Product Size: 60 (Dia) x 105 (H) mm
Base Holder: B22
Master Pkg.: 100 Units

9W | MRP (₹) 110

Product Code: PPI-SRS-9W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 900 Lumens
Efficacy: 100 lm/W
Product Size: 60 (Dia) x 105 (H) mm
Base Holder: B22
Master Pkg.: 100 Units

10W | MRP (₹) 110

Product Code: PPI-SRS-10W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 1000 Lumens
Efficacy: 100 lm/W
Product Size: 60 (Dia) x 105 (H) mm
Base Holder: B22
Master Pkg.: 100 Units

12W | MRP (₹) 180

Product Code: PPI-SRS-12W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 1200 Lumens
Efficacy: 100 lm/W
Product Size: 65 (Dia) x 125 (H) mm
Base Holder: B22
Master Pkg.: 50 Units

15W | MRP (₹) 260

Product Code: PPI-SRS-15W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 1500 Lumens
Efficacy: 100 lm/W
Product Size: 70 (Dia) x 135 (H) mm
Base Holder: B22
Master Pkg.: 50 Units

18W | MRP (₹) 360

Product Code: PPI-SRS-18W-HBB
Power Factor: >0.95
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 100 lm/W
Product Size: 80 (Dia) x 152 (H) mm
Base Holder: B22
Master Pkg.: 50 Units



ATRIA

HIGH POWER LED BULBS



IP20

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



1 YEAR
WARRANTY



20W | MRP (₹) 450

Product Code: PPI-ATA-20W-HPB

Power Factor: >0.95

Opr. Voltage: AC 100V~300V, 50Hz

Lumens : 2000 Lumens

Efficacy : 100 lm/W

Product Size : 80 (Dia) x 135 (H) mm

Base Holder : B22

Master Pkg. : 50 Units

30W | MRP (₹) 620

Product Code: PPI-ATA-30W-HPB

Power Factor: >0.95

Opr. Voltage: AC 100V~300V, 50Hz

Lumens : 3000 Lumens

Efficacy : 100 lm/W

Product Size : 100 (Dia) x 175 (H) mm

Base Holder : B22

Master Pkg. : 20 Units

40W | MRP (₹) 810

Product Code: PPI-ATA-40W-HPB

Power Factor: >0.95

Opr. Voltage: AC 100V~300V, 50Hz

Lumens : 4000 Lumens

Efficacy : 100 lm/W

Product Size : 120 (Dia) x 200 (H) mm

Base Holder : B22

Master Pkg. : 20 Units

50W | MRP (₹) 1,000

Product Code: PPI-ATA-50W-HPB

Power Factor: >0.95

Opr. Voltage: AC 100V~300V, 50Hz

Lumens : 5000 Lumens

Efficacy : 100 lm/W

Product Size : 140 (Dia) x 225 (H) mm

Base Holder : B22

Master Pkg. : 20 Units



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION




DOB
TECHNOLOGY



OVERHEATING
PROTECTION




BRIGHT LIGHT
OUTPUT

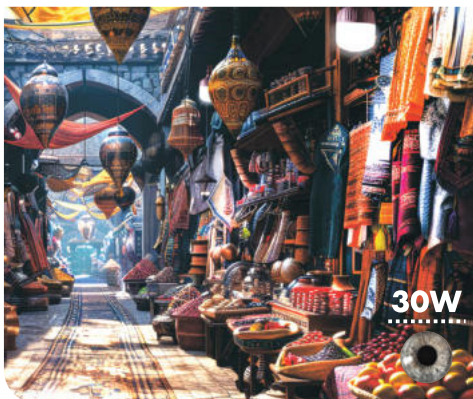

30W



40W

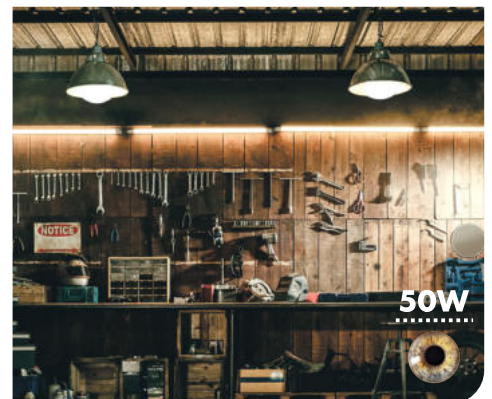

50W

NEUTRONSTAR

INVERTER LED BULBS



IP20

RoHS



1 YEAR WARRANTY



9W | MRP (₹) 900

Product Code: PPI-NTS-9W-INB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens: 945 Lumens (AC Mode)

Efficacy: 105 lm/W (AC Mode)

Charge Time: 4-5 Hrs (Max)

Product Size: 70 (Dia) x 140 (H) mm

Base Holder: B22

Master Pkg.: 50 Units

Bulb Backup: 3 Mode Dimming



350 LUMENS



200 LUMENS



100 LUMENS

3 STEP DIMMING WHILE TOGGLE SWITCH



CLICK ONCE
FOR HIGH LUMENS



CLICK TWICE
FOR MEDIUM LUMENS



CLICK THRICE
FOR LOW LUMENS

10W | MRP (₹) 600

Product Code: PPI-NTS-10W-INB

Power Factor: >0.95

Opr. Voltage: AC 100V~300V, 50Hz

Lumens: 1000 Lumens (AC Mode)

DC Lumens: 350 Lumens (DC Mode)

Efficacy: 100 lm/W (AC Mode)

Charge Time: 8-10 Hrs (Max)

Product Size: 70 (Dia) x 140 (H) mm

Base Holder: B22

Master Pkg.: 50 Units

Bulb Backup: Up to 4 Hrs



350 LUMENS

12W | MRP (₹) 1,100

Product Code: PPI-NTS-12W-INB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens: 1260 Lumens (AC Mode)

Efficacy: 105 lm/W (AC Mode)

Charge Time: 5-6 Hrs (Max)

Product Size: 70 (Dia) x 145 (H) mm

Base Holder: B22

Master Pkg.: 50 Units

Bulb Backup: 3 Mode Dimming



400 LUMENS



250 LUMENS



150 LUMENS



ENERGY SAVINGS



105 LUMENS PER WATT - AC MODE



WIDE BEAM ANGLE



QUICK CHARGING



EXCELLENT CRI



SURGE PROTECTION



OVER VOLTAGE PROTECTION



AUTOMATIC CHARGE MODE ON WHEN POWER CUT



OVER CHARGE & DEEP BATTERY DISCHARGE PROTECTION



AUTOMATIC BATTERY CHARGE WHEN POWER ON



CLICK ONCE
FOR HIGH LUMENS



CLICK TWICE
FOR MEDIUM LUMENS



CLICK THRICE
FOR LOW LUMENS

REGULUS LED BATTENS



IP20

RoHS



COOL
WHITE



WARM
WHITE



NEUTRAL
WHITE



RED



GREEN



PINK



1 YEAR
WARRANTY



36W

40W

50W

12W

20W

40W

12W | MRP (₹) 255

Product Code: PPI-RGS-12W-LBN

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 1200 Lumens

Efficacy : 100 lm/W

Product Size : 590 (L) x 23 (W) x 29 (H) mm

End Cap : Grey

Master Pkg. : 50 Units

20W | MRP (₹) 280

Product Code: PPI-RGS-20W-LBN

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 2000 Lumens

Efficacy : 100 lm/W

Product Size : 1100 (L) x 23 (W) x 29 (H) mm

End Cap : Grey

Master Pkg. : 40 Units

40W | MRP (₹) 735

Product Code: PPI-RGS-40W-LBN

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 4000 Lumens

Efficacy : 100 lm/W

Product Size : 1180 (L) x 30 (W) x 38 (H) mm

End Cap : Grey

Master Pkg. : 25 Units

36W | MRP (₹) 710

(MUSHROOM)

Product Code: PPI-RGS-36W-MLB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 3600 Lumens

Efficacy : 100 lm/W

Product Size : 1180 (L) x 30 (W) x 40 (H) mm

End Cap : Grey

Master Pkg. : 25 Units

40W | MRP (₹) 1,090

(HIGH POWER)

Product Code: PPI-RGS-40W-HPB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 4000 Lumens

Efficacy : 100 lm/W

Product Size : 1200 (L) x 30 (W) x 38 (H) mm

End Cap : Grey

Master Pkg. : 20 Units

50W | MRP (₹) 1,640

(HIGH POWER)

Product Code: PPI-RGS-50W-HPB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 5000 Lumens

Efficacy : 100 lm/W

Product Size : 1200 (L) x 60 (W) x 40 (H) mm

End Cap : Grey

Master Pkg. : 20 Units



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



SLEEK
DESIGN




OVERHEATING
PROTECTION



BRIGHT LIGHT
OUTPUT



20W

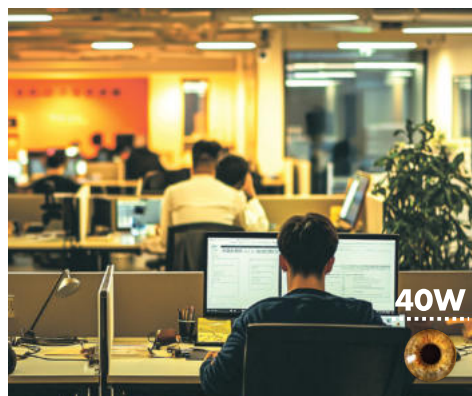

40W



50W

SAIPH

BACKLITE LED PANEL LIGHTS



IP20

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



2 YEARS
WARRANTY



10W | MRP (₹) 400

Product Code: PPI-SIP-10W-BPL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 1000 Lumens

Efficacy : 100 lm/W

Round Size : 115 (Dia) x 35 (H) mm

Square Size : 115 (L) x 115 (W) x 35 (H) mm

Master Pkg. : 40 Units

15W | MRP (₹) 600

Product Code: PPI-SIP-15W-BPL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 1500 Lumens

Efficacy : 100 lm/W

Round Size : 145 (Dia) x 35 (H) mm

Square Size : 145 (L) x 145 (W) x 35 (H) mm

Master Pkg. : 40 Units

18W | MRP (₹) 710

Product Code: PPI-SIP-18W-BPL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz



Lumens : 1800 Lumens

Efficacy : 100 lm/W

Round Size : 165 (Dia) x 35 (H) mm

Square Size : 165 (L) x 165 (W) x 35 (H) mm

Master Pkg. : 40 Units

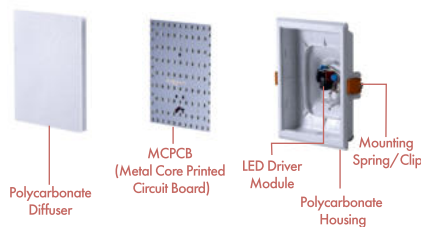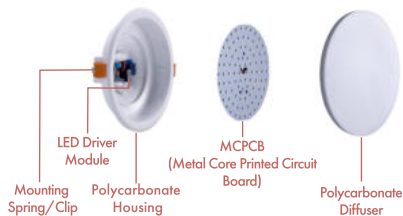

ENERGY SAVINGS



100 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



SURGE PROTECTION



OVER VOLTAGE PROTECTION



ELEGANT DESIGN




ANTI GLARE DIFFUSER



HIGH QUALITY POLYCARBONATE BUILT

CUTOUT		
10W	15W	18W
Dia 100 mm (4")	Dia 125 mm (5")	Dia 150 mm (6")
100 (L) x 100 (W) mm (4")	125 (L) x 125 (W) mm (5")	150 (L) x 150 (W) mm (6")

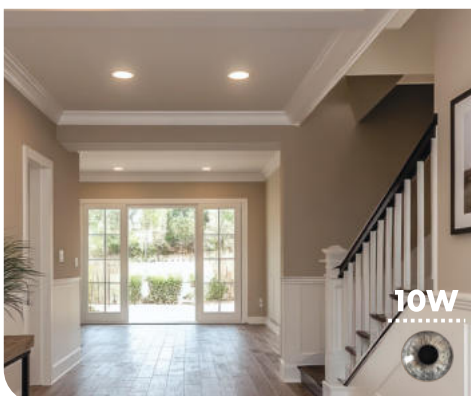

10W



15W



18W

SAIPH

EDGE LITE LED PANEL LIGHTS



IP20

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



2 YEARS
WARRANTY



8W | MRP (₹) 450

Product Code: PPI-SIP-8W-EPL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 800 Lumens

Efficacy : 100 lm/W

Round Size : 120 (Dia) x 25 (H) mm

Square Size : 120 (L) x 120 (W) x 25 (H) mm

Master Pkg. : 40 Units

12W | MRP (₹) 560

Product Code: PPI-SIP-12W-EPL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 1200 Lumens

Efficacy : 100 lm/W

Round Size : 145 (Dia) x 25 (H) mm

Square Size : 145 (L) x 145 (W) x 25 (H) mm

Master Pkg. : 40 Units

15W | MRP (₹) 820

Product Code: PPI-SIP-15W-EPL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 1500 Lumens

Efficacy : 100 lm/W

Round Size : 170 (Dia) x 25 (H) mm

Square Size : 170 (L) x 170 (W) x 25 (H) mm

Master Pkg. : 40 Units

20W | MRP (₹) 1,050

Product Code: PPI-SIP-20W-EPL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 2000 Lumens

Efficacy : 100 lm/W

Round Size : 220 (Dia) x 25 (H) mm

Square Size : 220 (L) x 220 (W) x 25 (H) mm

Master Pkg. : 40 Units



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



ELEGANT
DESIGN




ANTI GLARE
DIFFUSER



HIGH QUALITY
POLYCARBONATE BUILT

CUTOUT



8W	12W	15W	20W
Dia 100 mm (4")	Dia 125 mm (5")	Dia 150 mm (6")	Dia 200 mm (8")
100 (L) x 100 (W) mm (4")	125 (L) x 125 (W) mm (5")	150 (L) x 150 (W) mm (6")	200 (L) x 200 (W) mm (8")



8W



12W



20W

TRIANGULUM

TRICOLOUR BACKLITE LED PANEL LIGHTS



IP20

RoHS



3 IN 1 CCT CHANGING ON TOGGLE SWITCHING



10W | MRP (₹) 480

Product Code: PPI-TGM-10W-BPL 3 IN 1
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1000 Lumens (Cool White)
Efficacy: 100 lm/W (Cool White)
Round Size: 115 (Dia) x 35 (H) mm
Square Size: 115 (L) x 115 (W) x 35 (H) mm
Master Pkg.: 40 Units

15W | MRP (₹) 810


Product Code: PPI-TGM-15W-BPL 3 IN 1
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1500 Lumens (Cool White)
Efficacy: 100 lm/W (Cool White)
Round Size: 145 (Dia) x 35 (H) mm
Square Size: 145 (L) x 145 (W) x 35 (H) mm
Master Pkg.: 40 Units

18W | MRP (₹) 1,000

Product Code: PPI-TGM-18W-BPL 3 IN 1
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1800 Lumens (Cool White)
Efficacy: 100 lm/W (Cool White)
Round Size: 165 (Dia) x 35 (H) mm
Square Size: 165 (L) x 165 (W) x 35 (H) mm
Master Pkg.: 40 Units

CUTOUT		
10W	15W	18W
Dia 100 mm (4")	Dia 125 mm (5")	Dia 150 mm (6")
100 (L) x 100 (W) mm (4")	125 (L) x 125 (W) mm (5")	150 (L) x 150 (W) mm (6")

Note: * Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.

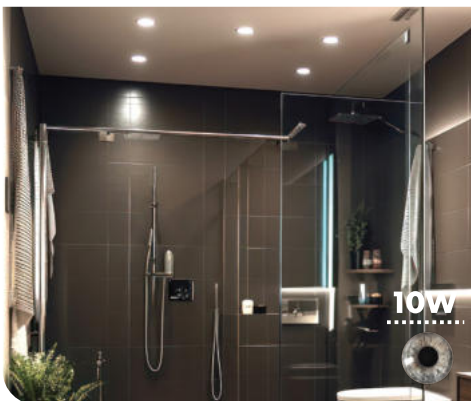

PEGASUS

NEO LED PANEL LIGHTS



IP20

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



6W | MRP (₹) 240

Product Code: PPI-PGS-6W-NRP
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 540 Lumens
Efficacy: 90 lm/W
Round Size: 100 (Dia) x 27 (H) mm
Square Size: 100 (L) x 100 (W) x 27 (H) mm
Master Pkg.: 100 Units

12W | MRP (₹) 370

Product Code: PPI-PGS-12W-NRP
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 1080 Lumens
Efficacy: 90 lm/W
Round Size: 130 (Dia) x 27 (H) mm
Square Size: 130 (L) x 130 (W) x 27 (H) mm
Master Pkg.: 60 Units

15W | MRP (₹) 515

Product Code: PPI-PGS-15W-NRP
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 1350 Lumens
Efficacy: 90 lm/W
Round Size: 155 (Dia) x 27 (H) mm
Square Size: 155 (L) x 155 (W) x 27 (H) mm
Master Pkg.: 60 Units



ENERGY
SAVINGS



90 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



DOB
TECHNOLOGY



ANTI-GLARE
DIFFUSER



HIGH QUALITY
POLYCARBONATE BUILT

CUTOUT



6W	12W	15W
Dia 75 mm (3")	Dia 100 mm (4")	Dia 125 mm (5")
75 (L) x 75 (W) mm (3")	100 (L) x 100 (W) mm (4")	125 (L) x 125 (W) mm (5")



TAYGETA

TWIN COLOUR LED PANEL LIGHTS



IP20

RoHS



COOL WHITE



WARM WHITE



RED



GREEN



BLUE



PINK



2 YEARS WARRANTY



3W+3W | MRP (₹) 440

Product Code: PPI-TGT-3W+3W-TCP
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 270 Lumens (Cool White)
Efficacy: 90 lm/W (Cool White)
Round Size: 105 (Dia) x 30 (H) mm
Square Size: 105 (L) x 105 (W) x 30 (H) mm
Master Pkg.: 60 Units

6W+6W | MRP (₹) 600

Product Code: PPI-TGT-6W+6W-TCP
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 540 Lumens (Cool White)
Efficacy: 90 lm/W (Cool White)
Round Size: 150 (Dia) x 32 (H) mm
Square Size: 150 (L) x 150 (W) x 32 (H) mm
Master Pkg.: 40 Units

12W+12W | MRP (₹) 870

Product Code: PPI-TGT-12W+12W-TCP
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1080 Lumens (Cool White)
Efficacy: 90 lm/W (Cool White)
Round Size: 200 (Dia) x 35 (H) mm
Square Size: 200 (L) x 200 (W) x 35 (H) mm
Master Pkg.: 40 Units

- 96%** ENERGY SAVINGS
- 90 LUMENS PER WATT (6500K)**
- 120°** WIDE BEAM ANGLE
- 50000hrs** LONG LIFE
- CRI > 80** EXCELLENT CRI
- 4KV** SURGE PROTECTION
- △ 4.5V** OVER VOLTAGE PROTECTION
- 3-IN-1** 3 IN 1 LIGHTING APPLICATION
- ON/OFF** TOGGLE SWITCH MECHANISM
- FLUCTUATION PROOF**

CUTOUT		
	DIAMETER	
3W+3W	6W+6W	12W+12W
Dia 70 mm	Dia 105 mm	Dia 155 mm
70 (L) x 70 (W) mm	105 (L) x 105 (W) mm	155 (L) x 155 (W) mm

Note : * Lumens mentioned are for 6500K, hence reduced by 20% to 30% for RGB combination of colours.



CARINA

RIMLESS SURFACE LED PANEL LIGHTS



8W | MRP (₹) 440

Product Code: PPI-CRN-8W-RSP
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 720 Lumens
Efficacy: 90 lm/W
Round Size: 90 (Dia) x 28 (H) mm
Square Size: 90 (L) x 90 (W) x 28 (H) mm
Master Pkg.: 40 Units

15W | MRP (₹) 635

Product Code: PPI-CRN-15W-RSP
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 1350 Lumens
Efficacy: 90 lm/W
Round Size: 120 (Dia) x 28 (H) mm
Square Size: 120 (L) x 120 (W) x 28 (H) mm
Master Pkg.: 40 Units

20W | MRP (₹) 780

Product Code: PPI-CRN-20W-RSP
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 90 lm/W
Round Size: 155 (Dia) x 28 (H) mm
Square Size: 155 (L) x 155 (W) x 28 (H) mm
Master Pkg.: 40 Units



ALNILAM

AL EDGELITE LED PANEL LIGHTS



IP20

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



8W | MRP (₹) 460

Product Code: PPI-ALM-8W-EPL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 800 Lumens
Efficacy: 100 lm/W
Round Size: 120 (Dia) x 20 (H) mm
Square Size: 120 (L) x 120 (W) x 20 (H) mm
Master Pkg.: 40 Units

12W | MRP (₹) 570

Product Code: PPI-ALM-12W-EPL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1200 Lumens
Efficacy: 100 lm/W
Round Size: 150 (Dia) x 20 (H) mm
Square Size: 150 (L) x 150 (W) x 20 (H) mm
Master Pkg.: 40 Units

15W | MRP (₹) 690

Product Code: PPI-ALM-15W-EPL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1500 Lumens
Efficacy: 100 lm/W
Round Size: 170 (Dia) x 20 (H) mm
Square Size: 170 (L) x 170 (W) x 20 (H) mm
Master Pkg.: 40 Units

18W | MRP (₹) 960

Product Code: PPI-ALM-18W-EPL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 100 lm/W
Round Size: 190 (Dia) x 20 (H) mm
Square Size: 190 (L) x 190 (W) x 20 (H) mm
Master Pkg.: 40 Units

22W | MRP (₹) 1,080

Product Code: PPI-ALM-22W-EPL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 2200 Lumens
Efficacy: 100 lm/W
Round Size: 225 (Dia) x 20 (H) mm
Square Size: 225 (L) x 225 (W) x 20 (H) mm
Master Pkg.: 40 Units



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



AL SLEEK
DESIGN



ANTI GLARE
DIFFUSER



HIGH GRADE
ALUMINIUM BUILT

CUTOUT



8W	12W	15W	18W	22W
Dia 100 mm	Dia 135 mm	Dia 155 mm	Dia 175 mm	Dia 210 mm
100 (L) x 100 (W) mm	135 (L) x 135 (W) mm	155 (L) x 155 (W) mm	175 (L) x 175 (W) mm	210 (L) x 210 (W) mm



ALNILAM

AL DEEP DOWN LED PANEL LIGHTS



IP20

RoHS



12W | MRP (₹) 1,230

Product Code: PPI-ALM-12W-ADD
Power Factor: >0.90
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1080 Lumens
Efficacy: 90 lm/W
Round Size: 120 (Dia) x 50 (H) mm
Square Size: 120 (L) x 120 (W) x 50 (H) mm
Master Pkg.: 20 Units

18W | MRP (₹) 1,500

Product Code: PPI-ALM-18W-ADD
Power Factor: >0.90
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1620 Lumens
Efficacy: 90 lm/W
Round Size: 155 (Dia) x 50 (H) mm
Square Size: 155 (L) x 155 (W) x 50 (H) mm
Master Pkg.: 20 Units

24W | MRP (₹) 1,830

Product Code: PPI-ALM-24W-ADD
Power Factor: >0.90
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 2160 Lumens
Efficacy: 90 lm/W
Round Size: 175 (Dia) x 50 (H) mm
Square Size: 175 (L) x 175 (W) x 50 (H) mm
Master Pkg.: 20 Units



ENERGY SAVINGS



90 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



SURGE PROTECTION



OVER VOLTAGE PROTECTION




ROBUST DESIGN



ANTI GLARE DIFFUSER



HIGH GRADE ALUMINIUM BUILD




CUTOUT

12W	18W	24W
Dia 110 mm	Dia 145 mm	Dia 165 mm
110 (L) x 110 (W) mm	145 (L) x 145 (W) mm	165 (L) x 165 (W) mm



12W

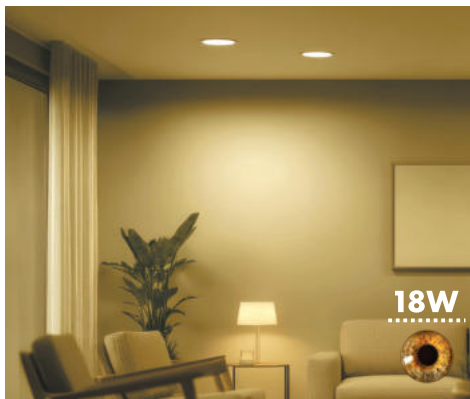

18W



24W

POLLUX

2X2 LED PANEL LIGHTS



IP20

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



2 YEARS
WARRANTY



36W | MRP (₹) 2,670

Product Code: PPI-PLX-36W-TTP
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 3600 Lumens
Efficacy: 100 lm/W
Product Size: 600 (L) x 600 (W) x 33 (H) mm
Master Pkg.: 4 Units


45W | MRP (₹) 3,200

Product Code: PPI-PLX-45W-TTP
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 4500 Lumens
Efficacy: 100 lm/W
Product Size: 600 (L) x 600 (W) x 33 (H) mm
Master Pkg.: 4 Units

- | | | | | |
|-----------------------------------|---|-----------------------------------|------------------------------------|--|
| 96%
ENERGY SAVINGS | 100 LUMENS
PER WATT | 120°
WIDE BEAM
ANGLE | 50000hrs
LONG
LIFE | CRI > 80
EXCELLENT
CRI |
| 4KV
SURGE
PROTECTION | 450V
OVER VOLTAGE
PROTECTION | SD
AL SLEEK
DESIGN | AL
ANTIGLARE
DIFFUSER | AL
HIGH GRADE
ALUMINIUM BUILD |

CUTOUT

590 (L) x 590 (W) mm



36W / 45W



36W



36W



45W



APUSTAR

MINI LED JUNCTION DOWNLIGHTS





4 WAY DEEP JUNCTION
BOX FITTING

3W | MRP (₹) 160


Product Code: PPI-APS-3W-MJD
Power Factor: >0.95
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 240 Lumens
Efficacy: 80 lm/W
Product Size: 80 (Dia) x 35 (H) mm
Master Pkg.: 100 Units

3W | MRP (₹) 250

(3 IN 1 COLOUR)
Product Code: PPI-APS-3W-MJD 3 IN 1
Power Factor: >0.95
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 240 Lumens (Cool White)
Efficacy: 80 lm/W (Cool White)
Product Size: 80 (Dia) x 35 (H) mm
Master Pkg.: 100 Units

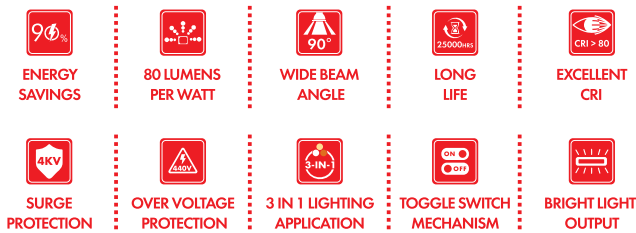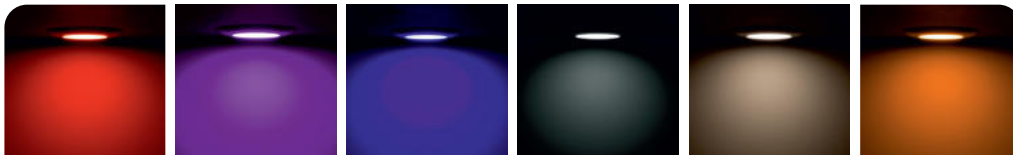

CUTOUT



Note : * Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K , 3000K and 20% to 30% for RGB combination of colours.



APUSTAR

COB LED JUNCTION DOWNLIGHTS



IP20

RoHS



COOL WHITE
(6500K)




WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



3 IN 1 CCT CHANGING ON TOGGLE SWITCHING



CLICK ONCE
FOR COOL WHITE



CLICK TWICE
FOR WARM WHITE



CLICK THRICE
FOR NEUTRAL WHITE



4 WAY DEEP JUNCTION
BOX FITTING



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



3 IN 1 LIGHTING
APPLICATION




TOGGLE SWITCH
MECHANISM



BRIGHT LIGHT
OUTPUT

CUTOUT



Note : * Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.



APUSTAR

TWIN COLOUR LED JUNCTION DOWNLIGHTS



IP20

RoHS



COOL WHITE



WARM WHITE



RED



GREEN



BLUE



PINK



1 YEAR WARRANTY

8W+8W | MRP (₹) 440

Product Code: PPI-APS-8+8W-TCJ

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 800 Lumens (Cool White)

Efficacy : 100 lm/W (Cool White)

Product Size : 88 (Dia) x 45 (H) mm

Cutout : 50 (Dia) mm

Master Pkg. : 100 Units

12W+12W | MRP (₹) 800

Product Code: PPI-APS-12+12W-TCJ

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 1200 Lumens (Cool White)


Efficacy : 100 lm/W (Cool White)

Product Size : 130 (Dia) x 50 (H) mm


Cutout : 50 - 125 (Dia) mm Adjustable

Master Pkg. : 60 Units

CUTOUT



8W + 8W



12W + 12W (ADJUSTABLE)



**4 WAY DEEP
JUNCTION BOX FITTING**



ENERGY SAVINGS



100 LUMENS PER WATT (6500K)



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



SURGE PROTECTION



OVER VOLTAGE PROTECTION



3 IN 1 LIGHTING APPLICATION



TOGGLE SWITCH MECHANISM



DECORATIVE FINISH




3 IN 1 CCT CHANGING ON TOGGLE SWITCHING


Note : * Lumens mentioned are for 6500K, hence reduced by 20% to 30% for RGB combination of colours.



CLICK ONCE
FOR COOL WHITE

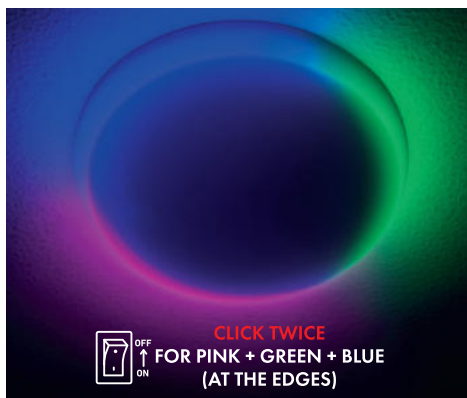

CLICK TWICE
FOR PINK + GREEN + BLUE
(AT THE EDGES)

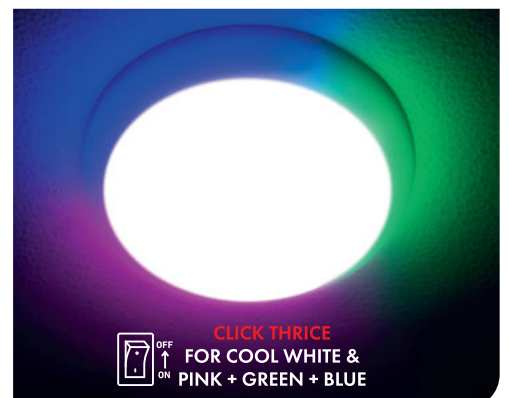

CLICK THRICE
FOR COOL WHITE &
PINK + GREEN + BLUE

APUSTAR

SLIM LED JUNCTION DOWNLIGHTS



IP20

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)

2 YEARS
WARRANTY



3 IN 1 CCT CHANGING ON TOGGLE SWITCHING



CLICK ONCE
FOR COOL WHITE



CLICK TWICE
FOR WARM WHITE



CLICK THIRCE
FOR NEUTRAL WHITE



4 WAY DEEP JUNCTION
BOX FITTING



ENERGY
SAVINGS



90 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



3 IN 1 LIGHTING
APPLICATION



TOGGLE SWITCH
MECHANISM



BRIGHT LIGHT
OUTPUT

7W | MRP (₹) 260

Product Code: PPI-APS-7W-SCJ

Power Factor: >0.95

Opr. Voltage: AC 100V~300V, 50Hz

Lumens : 630 Lumens

Efficacy : 90 lm/W

Product Size : 110 (Dia) x 30 (H) mm

Cutout : 80 (Dia) mm

Master Pkg. : 100 Units

7W | MRP (₹) 320

(3 IN 1 COLOUR)

Product Code: PPI-APS-7W-SCJ 3 IN 1

Power Factor: >0.95

Opr. Voltage: AC 100V~300V, 50Hz

Lumens : 630 Lumens (Cool White)


Efficacy : 90 lm/W (Cool White)

Product Size : 110 (Dia) x 30 (H) mm

Cutout : 80 (Dia) mm

Master Pkg. : 100 Units

CUTOUT 80mm(Dia)

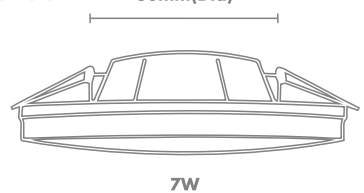

Note : * Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.



APUSTAR

RIMLESS LED JUNCTION DOWNLIGHTS



IP20

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



2 YEARS
WARRANTY



4 WAY DEEP
JUNCTION BOX FITTING

8W | MRP (₹) 450

Product Code: PPI-APS-8W-RJD

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 800 Lumens

Efficacy : 100 lm/W

Product Size : 85 (Dia) x 58 (H) mm

Cutout : 45 (Dia) mm

Master Pkg. : 100 Units

15W | MRP (₹) 760

Product Code: PPI-APS-15W-RJD

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 1500 Lumens

Efficacy : 100 lm/W

Product Size : 140 (Dia) x 60 (H) mm

Cutout : 45 (Dia) mm

Master Pkg. : 60 Units



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



COMPACT
DESIGN




ANTI GLARE
DIFFUSER




HIGH QUALITY
POLYCARBONATE BUILT

CUTOUT


45mm (Dia)




8W-15W

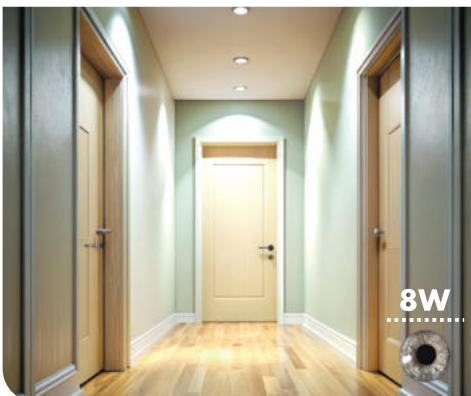

8W

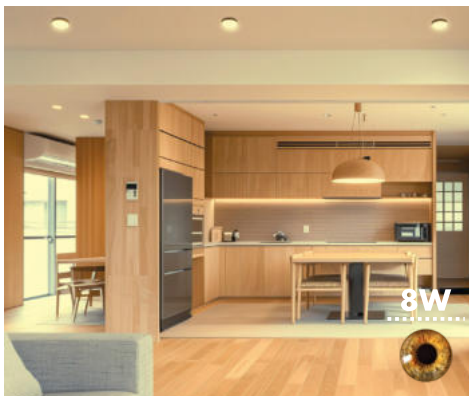

8W

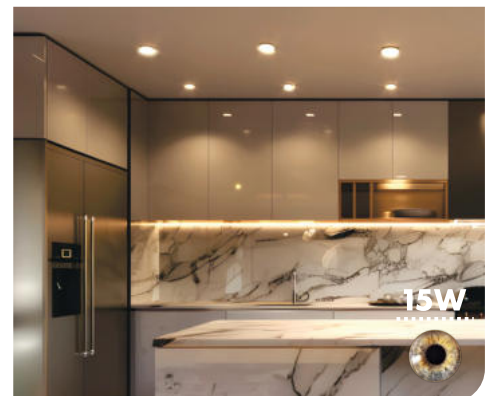

15W

BELLATRIX COB LED SPOTLIGHTS



IP20

RoHS



COOL
WHITE



WARM
WHITE



NEUTRAL
WHITE



RED



GREEN



BLUE



PINK

1 YEAR
WARRANTY



JUNIOR LED SPOTLIGHT

2W | MRP (₹) 120

Product Code: PPI-BTX-2W-JSL

Power Factor: >0.50

Opr. Voltage: AC 100V~300V, 50Hz

Lumens : 160 Lumens

Efficacy : 80 lm/W

Product Size : 42 (Dia) x 18 (H) mm

Cutout : 32 (Dia) mm

Master Pkg. : 500 Units

FIXED COB LED SPOTLIGHT

3W | MRP (₹) 240

Product Code: PPI-BTX-3W-FSL

Power Factor: >0.95

Opr. Voltage: AC 100V~300V, 50Hz

Lumens : 300 Lumens


Efficacy : 100 lm/W

Product Size : 80 (Dia) x 35 (H) mm


Cutout : 40 (Dia) mm

Master Pkg. : 100 Units

CUTOUT



2W



3W



ENERGY
SAVINGS



80 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



SLEEK
DESIGN



BRIGHT LIGHT
OUTPUT



HIGH QUALITY
COB CHIP



2W



3W



3W

BELLATRIX

MOVABLE COB LED SPOTLIGHTS



IP20

RoHS



COOL WHITE



WARM WHITE



NEUTRAL WHITE



RED



GREEN



BLUE



PINK



MOVABLE COB LED SPOTLIGHT

3W | MRP (₹) 250

Product Code: PPI-BTX-3W-MSL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 270 Lumens

Efficacy : 90 lm/W

Product Size : 70 (Dia) x 36 (H) mm

Master Pkg. : 100 Units

7W | MRP (₹) 360

Product Code: PPI-BTX-7W-MSL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 630 Lumens

Efficacy : 90 lm/W

Product Size : 110 (Dia) x 50 (H) mm

Master Pkg. : 100 Units

12W | MRP (₹) 700

Product Code: PPI-BTX-12W-MSL

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 1080 Lumens

Efficacy : 90 lm/W

Product Size : 150 (Dia) x 60 (H) mm

Master Pkg. : 60 Units

TRICOLOUR MOVABLE COB LED SPOTLIGHT

3W | MRP (₹) 350

Product Code: PPI-BTX-3W-MSL 3 IN 1

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 270 Lumens (Cool White)

Efficacy : 90 lm/W (Cool White)

Product Size : 70 (Dia) x 36 (H) mm

Master Pkg. : 100 Units

7W | MRP (₹) 460

Product Code: PPI-BTX-7W-MSL 3 IN 1

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 630 Lumens (Cool White)

Efficacy : 90 lm/W (Cool White)

Product Size : 110 (Dia) x 50 (H) mm

Master Pkg. : 100 Units

12W | MRP (₹) 800

Product Code: PPI-BTX-12W-MSL 3 IN 1

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 1080 Lumens (Cool White)

Efficacy : 90 lm/W (Cool White)

Product Size : 150 (Dia) x 60 (H) mm

Master Pkg. : 60 Units



ENERGY SAVINGS



90 LUMENS PER WATT



WIDE BEAM ANGLE



LONG LIFE



EXCELLENT CRI



SURGE PROTECTION



OVER VOLTAGE PROTECTION




MOVABLE DESIGN



BRIGHT LIGHT OUTPUT




HIGH QUALITY COB CHIP



CUTOUT

3W	7W	12W
Dia 55 mm	Dia 75 mm	Dia 120 mm

Note : * Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K , 3000K and 20% to 30% for RGB combination of colours.

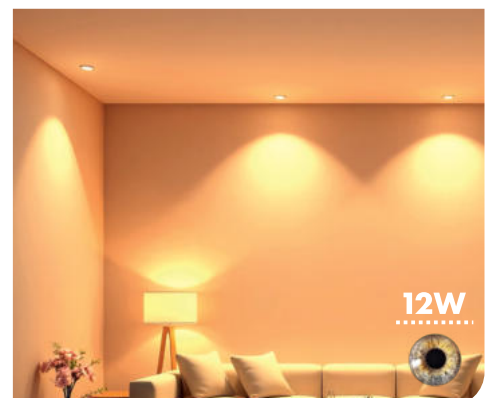

ALNITAK

DEEP COB LED SPOTLIGHTS



IP20

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



2 YEARS
WARRANTY



3 IN 1 CCT CHANGING ON TOGGLE SWITCHING



CLICK ONCE
FOR COOL WHITE



CLICK TWICE
FOR WARM WHITE



CLICK THRICE
FOR NEUTRAL WHITE



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



HEAVY DUTY HEAT
DISSIPATION



HIGH GRADE
ALUMINIUM BUILT



HIGH QUALITY
COB CHIP

7W | MRP (₹) 630


Product Code: PPI-ALT-7W-DCS
Power Factor: >0.90
Opr. Voltage : AC 90V~300V,50Hz
Lumens : 700 Lumens
Efficacy : 100 lm/W
Product Size : 65 (Dia) x 60 (H) mm
Cutout : 55 (Dia) mm
Master Pkg. : 20 Units

12W | MRP (₹) 830

Product Code: PPI-ALT-12W-DCS
Power Factor: >0.90
Opr. Voltage : AC 90V~300V,50Hz
Lumens : 1200 Lumens
Efficacy : 100 lm/W
Product Size : 85 (Dia) x 76 (H) mm
Cutout : 75 (Dia) mm
Master Pkg. : 20 Units

18W | MRP (₹) 1,120

Product Code: PPI-ALT-18W-DCS
Power Factor: >0.90
Opr. Voltage : AC 90V~300V,50Hz
Lumens : 1800 Lumens
Efficacy : 100 lm/W
Product Size : 95 (Dia) x 100 (H) mm
Cutout : 85 (Dia) mm
Master Pkg. : 20 Units




CUTOUT

7W	12W	18W
Dia 55 mm	Dia 75 mm	Dia 85 mm

Note : * Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K and 3000K.



7W

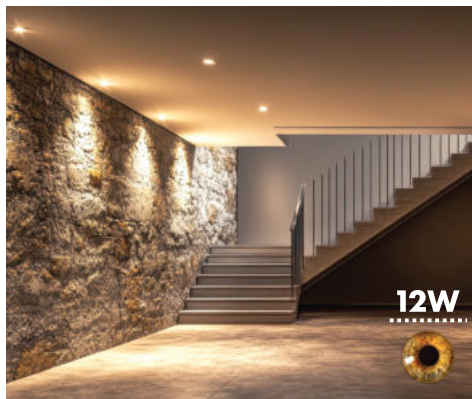

12W



18W

ALNITAK

PIXEL COB LED SPOTLIGHTS



IP20

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



2 YEARS
WARRANTY



7W | MRP (₹) 800




Product Code: PPI-ALT-7W-PCD
Power Factor: >0.90
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 700 Lumens
Efficacy: 100 lm/W
Product Size: 65 (Dia) x 63 (H) mm
Cutout: 55 (Dia) mm
Master Pkg.: 20 Units

12W | MRP (₹) 1,060



Product Code: PPI-ALT-12W-PCD
Power Factor: >0.90
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1200 Lumens
Efficacy: 100 lm/W
Product Size: 85 (Dia) x 70 (H) mm
Cutout: 72 (Dia) mm
Master Pkg.: 20 Units

18W | MRP (₹) 1,320

Product Code: PPI-ALT-18W-PCD
Power Factor: >0.90
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 100 lm/W
Product Size: 105 (Dia) x 83 (H) mm
Cutout: 95 (Dia) mm
Master Pkg.: 20 Units

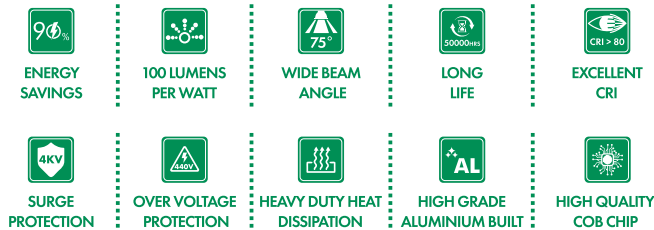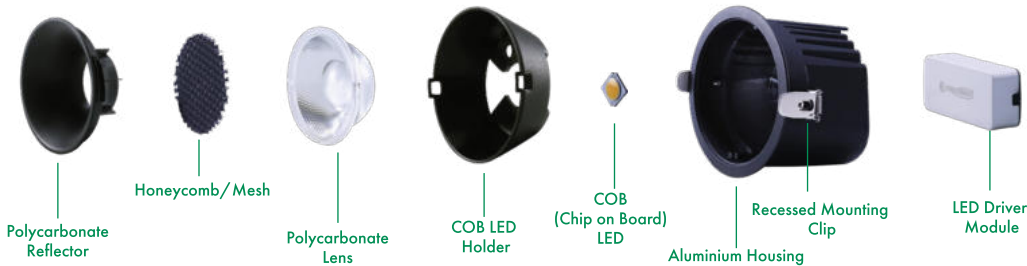

7W	12W	18W
Dia 55 mm	Dia 72 mm	Dia 95 mm

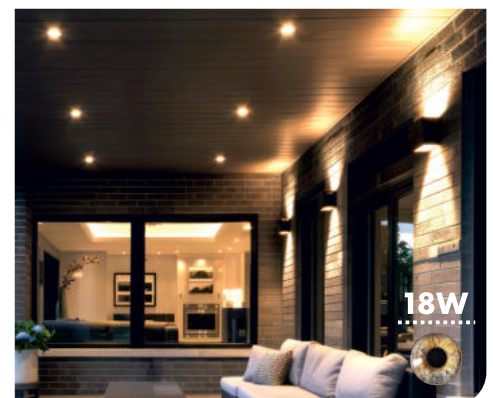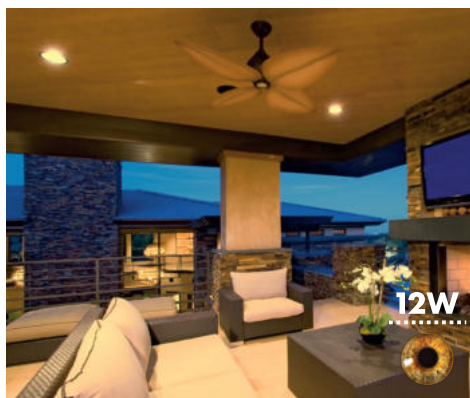

ALNITAK

SURFACE CYLINDER COB LED SPOTLIGHTS



IP20

RoHS




COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)

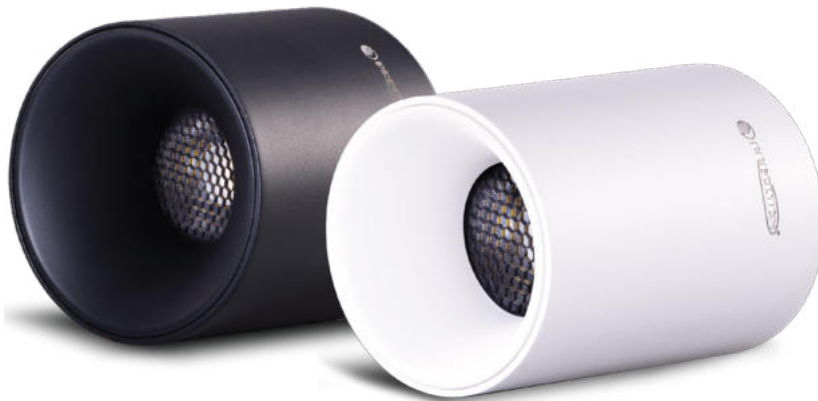

7W | MRP (₹) 890

Product Code: PPI-ALT-7W-CCS
Power Factor: >0.50
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 700 Lumens
Efficacy: 100 lm/W
Product Size: 55 (Dia) x 73 (H) mm
Cutout: Surface Mounting
Master Pkg.: 20 Units

12W | MRP (₹) 1,200

Product Code: PPI-ALT-12W-CCS
Power Factor: >0.90
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1200 Lumens
Efficacy: 100 lm/W
Product Size: 75 (Dia) x 83 (H) mm
Cutout: Surface Mounting
Master Pkg.: 20 Units

18W | MRP (₹) 1,500

Product Code: PPI-ALT-18W-CCS
Power Factor: >0.90
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 100 lm/W
Product Size: 97 (Dia) x 95 (H) mm
Cutout: Surface Mounting
Master Pkg.: 20 Units



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



HEAVY DUTY HEAT
DISSIPATION



HIGH GRADE
ALUMINIUM BUILT



HIGH QUALITY
COB CHIP



ALNITAK

SURFACE COB LED SPOTLIGHTS



IP20

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)

2 YEARS
WARRANTY



10W | MRP (₹) 1,000

Product Code: PPI-ALT-10W-SCS
Power Factor: >0.90
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 900 Lumens
Efficacy: 90 lm/W
Product Size: 50 (Dia) x 60 (W) x 165 (H) mm
Cutout: Surface Mounting
Master Pkg.: 20 Units

20W | MRP (₹) 1,500

Product Code: PPI-ALT-20W-SCS
Power Factor: >0.90
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 1800 Lumens
Efficacy: 90 lm/W
Product Size: 65 (Dia) x 70 (W) x 195 (H) mm
Cutout: Surface Mounting
Master Pkg.: 20 Units

30W | MRP (₹) 2,000

Product Code: PPI-ALT-30W-SCS
Power Factor: >0.90
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 2700 Lumens
Efficacy: 90 lm/W
Product Size: 75 (Dia) x 70 (W) x 215 (H) mm
Cutout: Surface Mounting
Master Pkg.: 20 Units



ENERGY
SAVINGS



90 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



HEAVY DUTY HEAT
DISSIPATION



HIGH GRADE
ALUMINIUM BUILT



HIGH QUALITY
COB CHIP



10W



20W



30W

ALNITAK

MOVABLE COB LED TRACK SPOTLIGHTS



IP20

RoHS



COOL WHITE
(6500K)




WARM WHITE
(3000K)



NEUTRAL WHITE
(4000K)



2 YEARS
WARRANTY

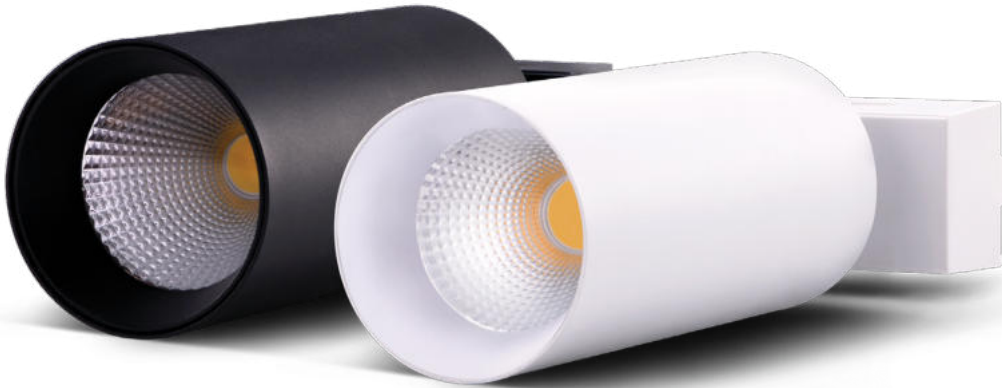

10W | MRP (₹) 1,140

Product Code: PPI-ALT-10W-MTS

Power Factor: >0.90

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 900 Lumens

Efficacy : 90 lm/W

Product Size : 50 (Dia) x 85 (W) x 175 (H) mm

Cutout : Track Mounting

Master Pkg. : 20 Units

20W | MRP (₹) 1,660

Product Code: PPI-ALT-20W-MTS

Power Factor: >0.90

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 1800 Lumens

Efficacy : 90 lm/W

Product Size : 65 (Dia) x 85 (W) x 205 (H) mm

Cutout : Track Mounting

Master Pkg. : 20 Units

30W | MRP (₹) 2,140

Product Code: PPI-ALT-30W-MTS

Power Factor: >0.90

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 2700 Lumens

Efficacy : 90 lm/W

Product Size : 75 (Dia) x 85 (W) x 225 (H) mm

Cutout : Track Mounting

Master Pkg. : 20 Units



ENERGY
SAVINGS



90 LUMENS
PER WATT



WIDE BEAM
ANGLE



LONG
LIFE



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



HEAVY DUTY HEAT
DISSIPATION



HIGH GRADE
ALUMINIUM BUILT




HIGH QUALITY
COB CHIP



10W



20W

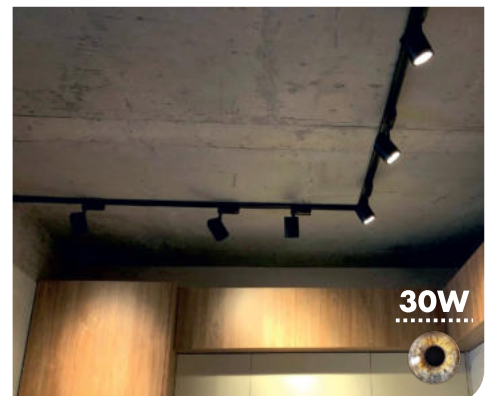

30W

VELORUM

LED STRIP LIGHTS



IP20

RoHS



Note : *Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K , 3000K and 20% to 30% for RGB combination of colours.

25W | MRP (₹) 520

(60 LED / METER)

Product Code: PPI-VRM-25W-1260-DSL

LED Size : 2835/3535

Opr. Voltage : DC 12V

Lumens : 450 Lumens / Meter

Cutting Unit : After 1 Meter

Roll Size : 100 (Dia) x 15 (H) mm

Strip Length : 5 Meter

Master Pkg. : 40 Units

40W | MRP (₹) 830

(120 LED / METER)

Product Code: PPI-VRM-40W-1212-DSL

LED Size : 2835/3535

Opr. Voltage : DC 12V

Lumens : 720 Lumens / Meter

Cutting Unit : After 1 Meter

Roll Size : 100 (Dia) x 15 (H) mm

Strip Length : 5 Meter

Master Pkg. : 40 Units

60W | MRP (₹) 1,230

(180 LED / METER)

Product Code: PPI-VRM-60W-1218-DSL

LED Size : 2835/3535

Opr. Voltage : DC 12V

Lumens : 1080 Lumens / Meter

Cutting Unit : After 1 Meter

Roll Size : 130 (Dia) x 20 (H) mm

Strip Length : 5 Meter

Master Pkg. : 40 Units

75W | MRP (₹) 1,330

(240 LED / METER)

Product Code: PPI-VRM-75W-1224-DSL

LED Size : 2835/3535

Opr. Voltage : DC 12V


Lumens : 1350 Lumens / Meter

Cutting Unit : After 1 Meter

Roll Size : 130 (Dia) x 20 (H) mm

Strip Length : 5 Meter

Master Pkg. : 40 Units

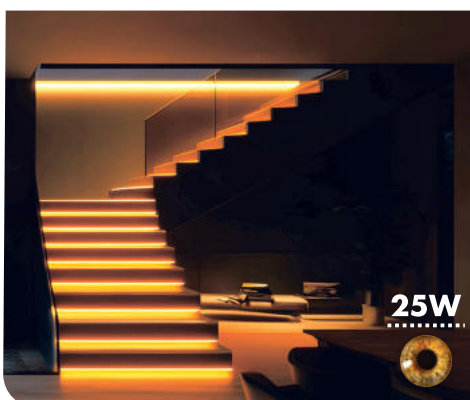






VELORUM

LED ROPE LIGHTS



IP65

RoHS



AC RECTIFIER KIT MRP (₹) 180

Product Code: PPI-VRM-ACDC-RRL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Product Size: 50 (L) x 20 (W) x 30 (H) mm
IP Protection: IP66
Master Pkg.: 50 Units



ENERGY SAVINGS



INGRESS PROTECTION



45 / 18 METER ROLL



DECORATIVE LIGHTING



EXCELLENT CRI



SURGE PROTECTION



OVER VOLTAGE PROTECTION



HEAVY DUTY FLEXIBLE PRODUCT



LM80 CERTIFIED LED CHIP



NEON SILICON TUBE CLEAR COVER

Note : *Lumens mentioned are for 6500K, hence reduced by 5% to 10% for 4000K, 3000K and 20% to 30% for RGB combination of colours.

6W/M | MRP (₹) 7,250

(60 LED/METER)

Product Code: PPI-VRM-6WPM-60-DRL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 540 Lumens / Meter
LED Size: 2835/2850
Roll Size: 255 (Dia) x 120 (H) mm
Rope Length: 45 Meter
Master Pkg.: 8 Units

8W/M | MRP (₹) 7,830

(120 LED/METER)

Product Code: PPI-VRM-8WPM-120-DRL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 720 Lumens / Meter
LED Size: 2835/2850
Roll Size: 255 (Dia) x 120 (H) mm
Rope Length: 45 Meter
Master Pkg.: 8 Units

6W/M | MRP (₹) 2,670


(60 LED/METER)

Product Code: PPI-VRM-6WPM-60-TRL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 360 Lumens / Meter
Colour: Orange - White - Green
Roll Size: 150 (Dia) x 70 (H) mm
Rope Length: 18 Meter
Master Pkg.: 12 Units

8W/M | MRP (₹) 3,100

(120 LED/METER)

Product Code: PPI-VRM-8WPM-120-TRL
Power Factor: >0.95
Opr. Voltage: AC 90V ~ 300V, 50Hz
Lumens: 480 Lumens / Meter
Colour: Orange - White - Green
Roll Size: 150 (Dia) x 70 (H) mm
Rope Length: 18 Meter
Master Pkg.: 12 Units

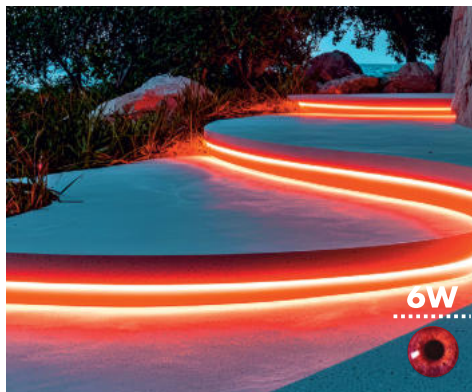

CENTAURUS

OVAL & NEO LENS LED STREET LIGHTS



IP65

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



2 YEARS
WARRANTY

24W | MRP (₹) 1,080

Product Code : PPI-CRS-24W-OSL
Power Factor : >0.95
Opr. Voltage : AC 90V~300V, 50Hz
Lumens : 2640 Lumens
Efficacy : 110 lm/W
Product Size : 262 (L) x 120 (W) x 55 (H) mm
Pole Diameter : 45 (Dia) mm
Master Pkg. : 30 Units

36W | MRP (₹) 1,570

Product Code : PPI-CRS-36W-OSL
Power Factor : >0.95
Opr. Voltage : AC 90V~300V, 50Hz
Lumens : 3960 Lumens
Efficacy : 110 lm/W
Product Size : 295 (L) x 145 (W) x 55 (H) mm
Pole Diameter : 45 (Dia) mm
Master Pkg. : 20 Units

24W-N | MRP (₹) 860

Product Code : PPI-CRS-24W-OSL N
Power Factor : >0.90
Opr. Voltage : AC 140V ~ 300V, 50Hz
Lumens : 2160 Lumens
Efficacy : 90 lm/W
Product Size : 245 (L) x 90 (W) x 58 (H) mm
Pole Diameter : 50 (Dia) mm
Master Pkg. : 20 Units

36W-N | MRP (₹) 1,000

Product Code : PPI-CRS-36W-OSL N
Power Factor : >0.90
Opr. Voltage : AC 140V ~ 300V, 50Hz
Lumens : 3240 Lumens
Efficacy : 90 lm/W
Product Size : 295 (L) x 95 (W) x 55 (H) mm
Pole Diameter : 50 (Dia) mm
Master Pkg. : 20 Units

50W | MRP (₹) 2,000

Product Code : PPI-CRS-50W-OSL
Power Factor : >0.95
Opr. Voltage : AC 90V~300V, 50Hz
Lumens : 5500 Lumens
Efficacy : 110 lm/W
Product Size : 345 (L) x 175 (W) x 55 (H) mm
Pole Diameter : 50 (Dia) mm
Master Pkg. : 20 Units

100W | MRP (₹) 3,360

Product Code : PPI-CRS-100W-OSL
Power Factor : >0.95
Opr. Voltage : AC 90V~300V, 50Hz
Lumens : 11000 Lumens
Efficacy : 110 lm/W
Product Size : 385 (L) x 200 (W) x 60 (H) mm
Pole Diameter : 55 (Dia) mm
Master Pkg. : 10 Units

50W-N | MRP (₹) 1,360

Product Code : PPI-CRS-50W-OSL N
Power Factor : >0.90
Opr. Voltage : AC 140V ~ 300V, 50Hz
Lumens : 4500 Lumens
Efficacy : 90 lm/W
Product Size : 380 (L) x 105 (W) x 80 (H) mm
Pole Diameter : 70 (Dia) mm
Master Pkg. : 20 Units

100W-N | MRP (₹) 2,130

Product Code : PPI-CRS-100W-OSL N
Power Factor : >0.90
Opr. Voltage : AC 140V ~ 300V, 50Hz
Lumens : 9000 Lumens
Efficacy : 90 lm/W
Product Size : 435 (L) x 125 (W) x 80 (H) mm
Pole Diameter : 70 (Dia) mm
Master Pkg. : 10 Units



ENERGY
SAVINGS



110/90 LUMENS
PER WATT



WIDE BEAM
ANGLE



INGRESS
PROTECTION



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION




HEAVY DUTY HEAT
DISSIPATION




ALUMINIUM
DIE CAST BODY



HIGH GRADE
POLYCARBONATE DIFFUSER

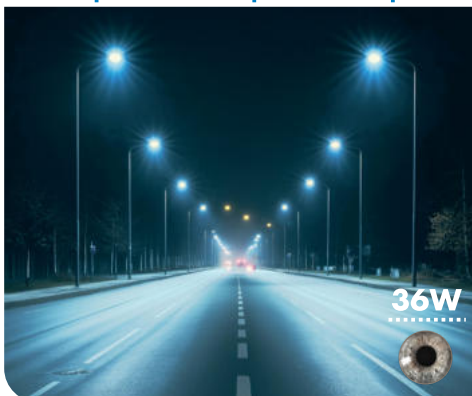

36W

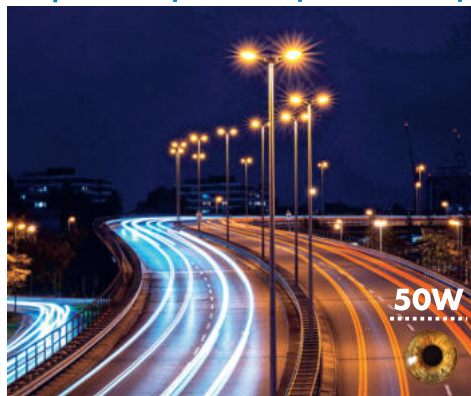

50W



100W

CENTAURUS

LENS LED STREET LIGHTS



IP65

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)

2 YEARS
WARRANTY



20W | MRP (₹) 1,190

Product Code	: PPI-CRS-20W-LSL
Power Factor	: >0.95
Opr. Voltage	: AC 90V~300V, 50Hz
Lumens	: 2000 Lumens
Efficacy	: 100 lm/W
Product Size	: 280 (L) x 105 (W) x 55 (H) mm
Product Diameter	: 45 (Dia) mm
Master Pkg.	: 30 Units

30W | MRP (₹) 1,600

Product Code	: PPI-CRS-30W-LSL
Power Factor	: >0.95
Opr. Voltage	: AC 90V~300V, 50Hz
Lumens	: 3000 Lumens
Efficacy	: 100 lm/W
Product Size	: 320 (L) x 125 (W) x 55 (H) mm
Product Diameter	: 45 (Dia) mm
Master Pkg.	: 20 Units

50W | MRP (₹) 2,150

Product Code	: PPI-CRS-50W-LSL
Power Factor	: >0.95
Opr. Voltage	: AC 90V~300V, 50Hz
Lumens	: 5000 Lumens
Efficacy	: 100 lm/W
Product Size	: 375 (L) x 165 (W) x 60 (H) mm
Product Diameter	: 45 (Dia) mm
Master Pkg.	: 20 Units

100W | MRP (₹) 3,500

Product Code	: PPI-CRS-100W-LSL
Power Factor	: >0.95
Opr. Voltage	: AC 90V~300V, 50Hz
Lumens	: 10000 Lumens
Efficacy	: 100 lm/W
Product Size	: 475 (L) x 205 (W) x 65 (H) mm
Product Diameter	: 50 (Dia) mm
Master Pkg.	: 10 Units



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



INGRESS
PROTECTION



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION




HEAVY DUTY HEAT
DISSIPATION



ALUMINIUM
DIE CAST BODY



HIGH GRADE
POLYCARBONATE DIFFUSER

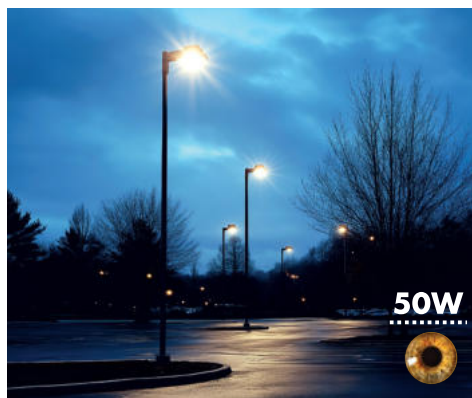

MINTAKA

LENS LED FLOOD LIGHTS



IP66

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)

2 YEARS
WARRANTY



30W | MRP (₹) 1,090

Product Code: PPI-MTK-30W-LFL
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 3000 Lumens
Efficacy: 100 lm/W
Product Size: 210 (L) x 150 (W) x 25 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 30 Units

50W | MRP (₹) 1,280

Product Code: PPI-MTK-50W-LFL
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 5000 Lumens
Efficacy: 100 lm/W
Product Size: 210 (L) x 150 (W) x 25 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 30 Units

100W | MRP (₹) 2,300

Product Code: PPI-MTK-100W-LFL
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 10000 Lumens
Efficacy: 100 lm/W
Product Size: 260 (L) x 200 (W) x 25 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 20 Units

200W | MRP (₹) 4,140

Product Code: PPI-MTK-200W-LFL
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 20000 Lumens
Efficacy: 100 lm/W
Product Size: 350 (L) x 250 (W) x 25 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 20 Units



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



INGRESS
PROTECTION



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



HEAVY DUTY HEAT
DISSIPATION



ALUMINIUM
DIE CAST BODY



HIGH GRADE
POLYCARBONATE DIFFUSER



MINTAKA

TUBULAR LENS LED FLOOD LIGHTS



IP66

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



30W | MRP (₹) 1,630

Product Code: PPI-MTK-30W-TFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 3150 Lumens
Efficacy: 105 lm/W
Product Size: 190 (L) x 160 (W) x 30 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 30 Units

50W | MRP (₹) 2,070

Product Code: PPI-MTK-50W-TFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 5250 Lumens
Efficacy: 105 lm/W
Product Size: 210 (L) x 195 (W) x 30 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 20 Units

100W | MRP (₹) 3,230

Product Code: PPI-MTK-100W-TFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 10500 Lumens
Efficacy: 105 lm/W
Product Size: 270 (L) x 240 (W) x 30 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 20 Units

150W | MRP (₹) 4,720

Product Code: PPI-MTK-150W-TFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 15750 Lumens
Efficacy: 105 lm/W
Product Size: 320 (L) x 280 (W) x 35 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 10 Units

200W | MRP (₹) 5,200

Product Code: PPI-MTK-200W-TFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 21000 Lumens
Efficacy: 105 lm/W
Product Size: 320 (L) x 280 (W) x 35 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 10 Units



ENERGY
SAVINGS



105 LUMENS
PER WATT



WIDE BEAM
ANGLE



INGRESS
PROTECTION



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION




HEAVY DUTY HEAT
DISSIPATION



ALUMINIUM
DIE CAST BODY



HIGH GRADE
POLYCARBONATE DIFFUSER

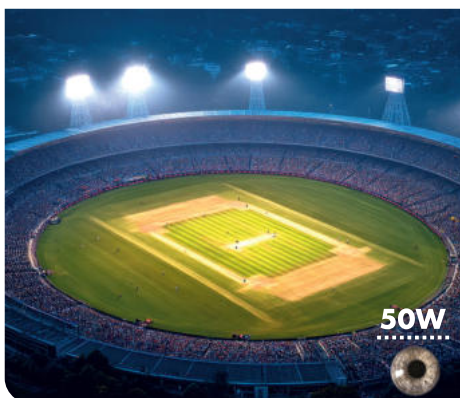

MINTAKA

TG LED FLOOD LIGHTS



IP66

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)

2 YEARS
WARRANTY



30W | MRP (₹) 1,810

Product Code: PPI-MTK-30W-GFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 3300 Lumens
Efficacy: 110 lm/W
Product Size: 185 (L) x 180 (W) x 45 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 20 Units

50W | MRP (₹) 2,260

Product Code: PPI-MTK-50W-GFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 5500 Lumens
Efficacy: 110 lm/W
Product Size: 230 (L) x 225 (W) x 50 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 20 Units

100W | MRP (₹) 3,770

Product Code: PPI-MTK-100W-GFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 11000 Lumens
Efficacy: 110 lm/W
Product Size: 290 (L) x 290 (W) x 60 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 10 Units

150W | MRP (₹) 5,650

Product Code: PPI-MTK-150W-GFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 16500 Lumens
Efficacy: 110 lm/W
Product Size: 285 (L) x 275 (W) x 60 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 10 Units

200W | MRP (₹) 6,670


Product Code: PPI-MTK-200W-GFL
Power Factor: >0.95
Opr. Voltage: AC 90V~300V, 50Hz
Lumens: 22000 Lumens
Efficacy: 110 lm/W
Product Size: 335 (L) x 315 (W) x 60 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 10 Units

50W-N | MRP (₹) 1,570

Product Code: PPI-MTK-50W-N-GFL
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 5000 Lumens
Efficacy: 100 lm/W
Product Size: 185 (L) x 180 (W) x 45 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 20 Units

100W-N | MRP (₹) 2,720

Product Code: PPI-MTK-100W-N-GFL
Power Factor: >0.90
Opr. Voltage: AC 100V~300V, 50Hz
Lumens: 10000 Lumens
Efficacy: 100 lm/W
Product Size: 230 (L) x 225 (W) x 50 (H) mm
Mount Type: Bracket Mounting
Master Pkg.: 20 Units

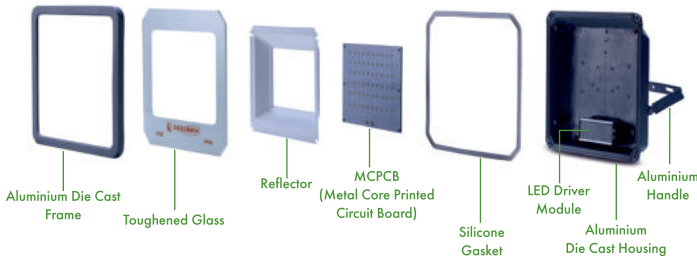

PROCYON

LENS LED Highbay Lights



IP66

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)

2 YEARS
WARRANTY



50W | MRP (₹) 3,890

Product Code: PPI-PCN-50W-LHB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 5000 Lumens

Efficacy : 100 lm/W

Product Size : 245 (Dia) x 120 (H) mm

Mount Type : Bracket Mounting/ Hanging Hook Screw

Master Pkg. : 6 Units

100W | MRP (₹) 5,280

Product Code: PPI-PCN-100W-LHB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 10000 Lumens

Efficacy : 100 lm/W

Product Size : 245 (Dia) x 120 (H) mm

Mount Type : Bracket Mounting/ Hanging Hook Screw

Master Pkg. : 6 Units

150W | MRP (₹) 7,350

Product Code: PPI-PCN-150W-LHB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 15000 Lumens

Efficacy : 100 lm/W

Product Size : 340 (Dia) x 130 (H) mm

Mount Type : Bracket Mounting/ Hanging Hook Screw

Master Pkg. : 4 Units

200W | MRP (₹) 9,200

Product Code: PPI-PCN-200W-LHB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 20000 Lumens

Efficacy : 100 lm/W

Product Size : 360 (Dia) x 175 (H) mm

Mount Type : Bracket Mounting/ Hanging Hook Screw

Master Pkg. : 4 Units



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



INGRESS
PROTECTION



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION




HEAVY DUTY HEAT
DISSIPATION



ALUMINIUM
DIE CAST BODY



HIGH GRADE
POLYCARBONATE DIFFUSER

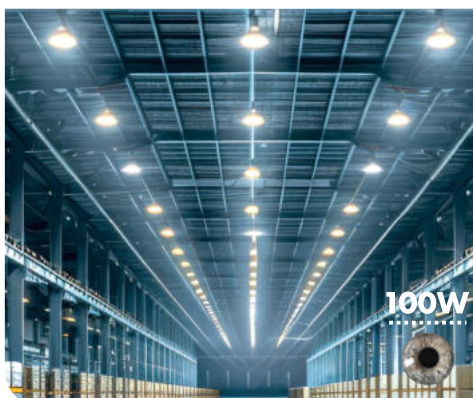

PROCYON

SPIRAL LENS LED Highbay Lights



IP66

RoHS



COOL WHITE
(6500K)



WARM WHITE
(3000K)



2 YEARS
WARRANTY



ENERGY
SAVINGS



100 LUMENS
PER WATT



WIDE BEAM
ANGLE



INGRESS
PROTECTION



EXCELLENT
CRI



SURGE
PROTECTION



OVER VOLTAGE
PROTECTION



HEAVY DUTY HEAT
DISSIPATION



ALUMINIUM
DIE CAST BODY



HIGH GRADE
POLYCARBONATE DIFFUSER

50W | MRP (₹) 4,000

Product Code: PPI-PCN-50W-SHB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 5000 Lumens

Efficacy : 100 lm/W

Product Size : 255 (Dia) x 165 (H) mm

Mount Type : Bracket Mounting/Hanging Hook Screw

Master Pkg. : 6 Units

100W | MRP (₹) 5,720

Product Code: PPI-PCN-100W-SHB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 10000 Lumens

Efficacy : 100 lm/W

Product Size : 255 (Dia) x 165 (H) mm

Mount Type : Bracket Mounting/Hanging Hook Screw

Master Pkg. : 6 Units

150W | MRP (₹) 7,800

Product Code: PPI-PCN-150W-SHB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 15000 Lumens

Efficacy : 100 lm/W

Product Size : 340 (Dia) x 130 (H) mm

Mount Type : Bracket Mounting/Hanging Hook Screw

Master Pkg. : 4 Units

200W | MRP (₹) 9,850

Product Code: PPI-PCN-200W-SHB

Power Factor: >0.95

Opr. Voltage: AC 90V~300V, 50Hz

Lumens : 20000 Lumens

Efficacy : 100 lm/W

Product Size : 360 (Dia) x 175 (H) mm

Mount Type : Bracket Mounting/Hanging Hook Screw

Master Pkg. : 4 Units



LIGHTING RELATED TERMS

CRI	Colour Rendering Index	CRI is an assessment of how the light source shows object colour "naturally" when compared to a familiar basis of daylight
CCT	Correlated Colour Temperature	CCT defines how the light appears and how it might make us feel
AC	Alternating Current	Electricity is delivered from local power grid to your home
DC	Direct Current	DC voltage is a constant voltage that drives the current in one direction
DOB	Driver on Board	DOB configuration is based on the consideration that LED drivers have been dominantly designed on metal core printed circuit board (MCPCB)
lm / W	Lumen per Watt	A measurement of luminous efficacy, which is the light output in lumens using one watt of electricity
BEE	Bureau of Energy Efficiency	BEE indicates the energy efficiency of a product and supports consumers to make informed choices when purchasing products
BIS	Bureau of Indian Standards	BIS is a quality standard certificate required for manufacturing and selling products in India, ensuring safety, quality, and reliability
RoHS	Restriction of Hazardous Substances	European Standards Restriction of Hazardous Substances
IP20	Ingress Protection 20	IP20 means an electrical enclosure is protected against solid objects
IP65	Ingress Protection 65	IP65 rating means a product is completely protected from dust and protection against low pressure water jets (e.g. 6.3 mm nozzle - water spread 12.5 litre in 1 minute)
IP66	Ingress Protection 66	IP66 rating means a product is completely protected from dust and protection against high pressure water jets (e.g. 12.5 mm nozzle - water spread 100 litre in 1 minute)
Dia.	Diameter	A diameter of a circle is any straight line segment that passes through the centre of the circle and whose endpoints lie on the circle
L x W x H	Length x Width x Height	Product area/size measurement term
	Double Insulated Appliance	This protection of appliances marked with this symbol is ensured by double insulation and does not require a safety connection to electrical earth (ground)
	Do not Dispose Trash	This Symbol indicates prevent pollution and protect the environment, it's crucial to not dispose of trash improperly
	Recycling Process	Recycling is the process of collecting and reprocessing materials, like paper, glass, and plastic to create new products and reduce waste



TERMS & CONDITIONS:

- 1) Prices are subject to revise without prior notice.**
- 2) MRP indicates Maximum Retail Price. Taxes and local levies as applicable are inclusive.**
- 3) GST applicable extra on discounted price of MRP.**
- 4) Orders should be placed as per master pack quantity only.**
- 5) Actual products may vary from the product shown in the catalogue/pricelist.**
- 6) All specifications are based on standard test conditions in laboratory at ambient temperature with standard equipment's.**
- 7) Image/colours used in the catalogue/pricelist are strictly for representation purpose only.**
- 8) Continuous design improvement is a routine process at Precision, Data provided may change without any prior information. Customers are advised to reconfirm the data or product dimensions before purchase.**
- 9) Precision reserves the right to modify or change the product design and specification in the future without prior intimation.**



BE THE SOURCE

PRECISION PLASTIC INDUSTRIES PVT. LTD.

19-D, Nand Jyot Industrial Estate, Safed Pool,
Andheri-Kurla Road, Andheri East,
Mumbai-400072. Maharashtra, India.



WE CARE: +91 7715000015 | www.precisionpipes.com